



COMMERCIAL & ALL OTHER STREETS

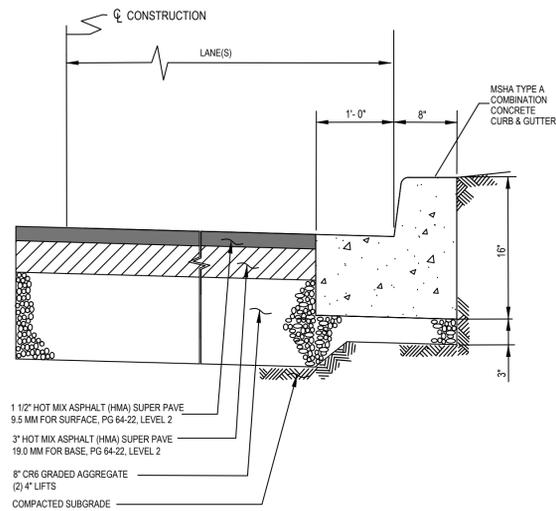


RESIDENTIAL & LOCAL STREETS & PARKING LOTS

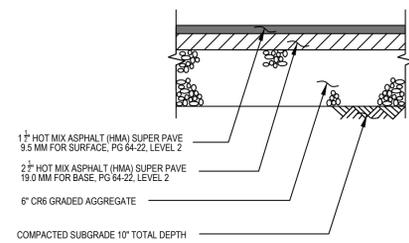


USE - IN - COMMON DRIVEWAYS

PAVEMENT SECTIONS
Not to Scale

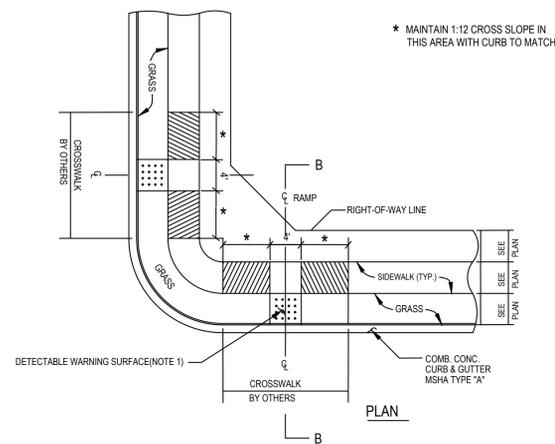


HANDICAP RAMPS
Not to Scale

- NOTES
- SHA STANDARD MD655.40 DETECTABLE WARNING SURFACE.
 - CONTRACTOR IS RESPONSIBLE FOR ENSURING THAT SIDEWALK RAMP MUST CONFORM TO CURRENT AMERICAN DISABILITIES ACT MANUAL ON ACCESS GUIDELINES FOR BUILDING AND FACILITIES.

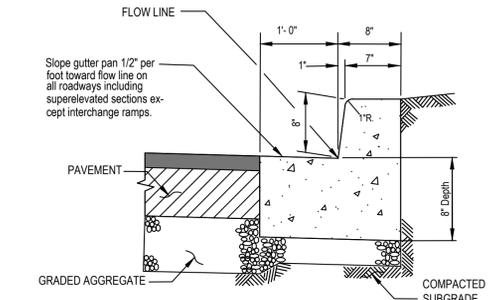





COMBINATION CONCRETE CURB & GUTTER (MSHA TYPE A)
Not to Scale

- NOTES
- Maximum joint spacing = 10'-0".


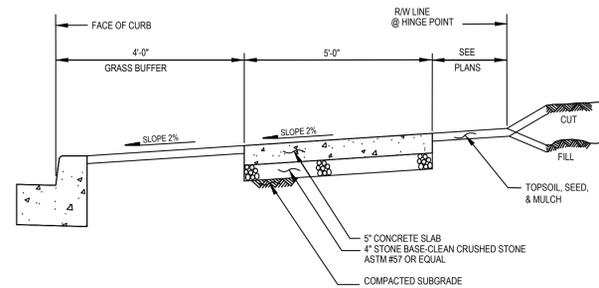


5' CONCRETE SIDEWALK
Not to Scale

- NOTES
- CONTRACTOR SHALL STRIKE CONTROL JOINTS EVERY 5'-0" AND PLACE EXPANSION JOINTS EVERY 20'-0"
 - CONTRACTOR TO INSTALL 1/2" PREFORMED EXPANSION JOINT MATERIAL AT ALL EXPANSION JOINTS AND WHERE SIDEWALK ABUTS CONCRETE CURB, FOUNDATIONS, APRONS, OR OTHER CONCRETE STRUCTURES.

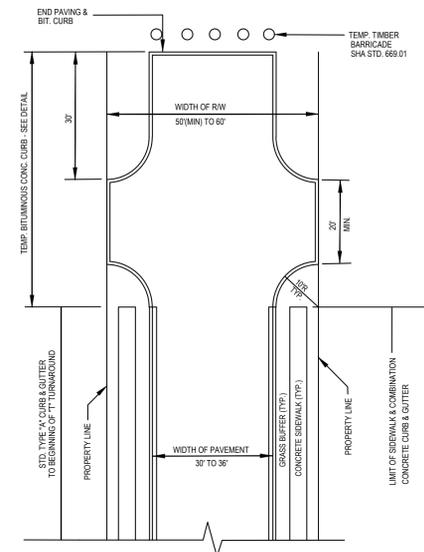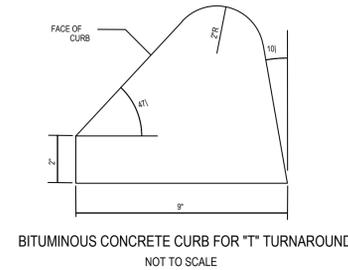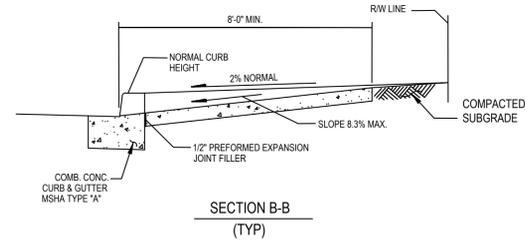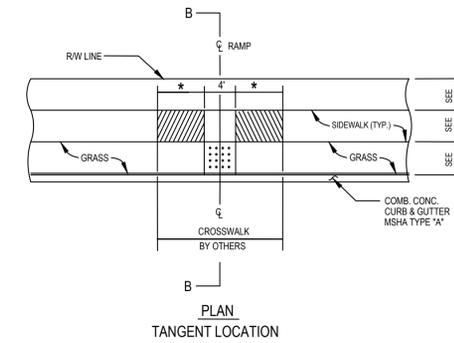


TEMPORARY TYPE "T" TURNAROUND
Not to Scale

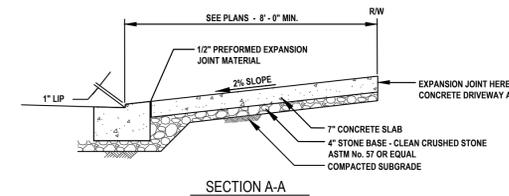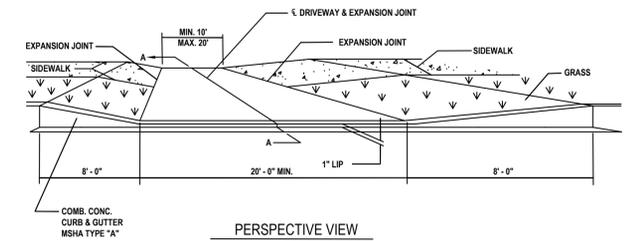

RESIDENTIAL CONCRETE DRIVEWAY APRON
Not to Scale


GENERAL CONSTRUCTION NOTES

- All concrete construction shown on these standard details shall use 3000 P.S.I., SHA Mix No. 2 concrete unless otherwise specified on these plans.
- All storm drain structures shall be underlain with a minimum 6" clean crushed stone base.

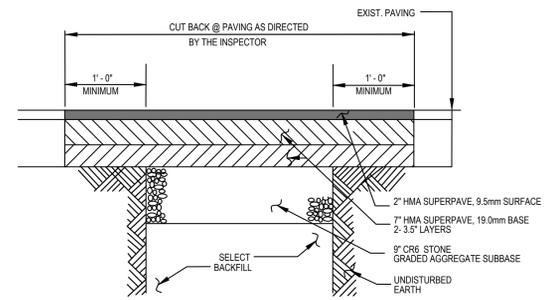

Road Sign Detail

Not to Scale
Square tubular 14 ga.
Holes 1" center entire length

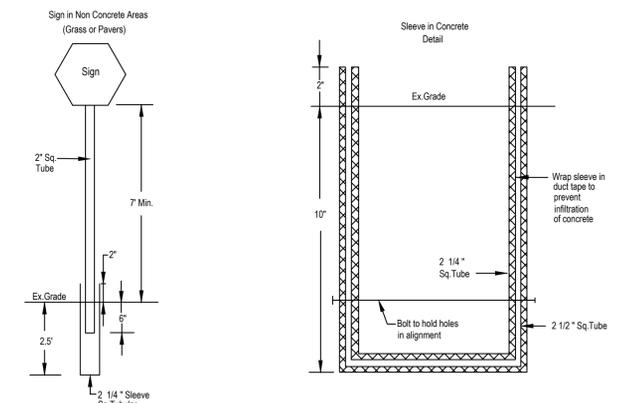


ENGINEER

DATE

REVISION

BY

8/13	REVISED SIDEWALK TITLE AND JOINT NOTES	R.A.P.
3/13	REVISED COMMERCIAL PAVE SECTION, HC RAMPS, PAVE PATCH DETAILS	R.A.P.
2/08	REVISED RESIDENTIAL CONCRETE DRIVEWAY APRON DETAIL	BJJ
5/05	REVISED PAVING DETAILS ADDED SYMBOLOGY	BPS
3/97	HANDICAP RAMP DETAIL	JMM



CITY OF WESTMINSTER

STANDARD ROADWAY CONSTRUCTION DETAILS

CARROLL COUNTY, MARYLAND

SHEET: _____ OF: _____
DATE: _____
SCALE: NOT TO SCALE